

» AS40Z Angled Frame Conveyors




Features

- » Z, L & R configurations for any elevating or lowering application
- » Rigid aluminum frame (with tee slots) resists twisting — a leading cause of tracking issues among competing conveyors
- » Optional V-Guide belts aid in belt tracking in hard-to-reach applications
- » Tension Release tails flip up at the push of a button for easy belt changes and under-belt cleaning
- » Sealed, deep groove double-row ball bearings for higher loads and longer life
- » Z-Track design gives you control over belt tracking, even through belt changes
- » Available Brushless DC Motors offer a compact drive with high-tech features

Specifications

- » Widths: 8", 10", 12", 18", 21", 24"
- » Lengths: up to 20'
- » Loads: up to 120 lbs
- » Speeds: up to 200 FPM
- » Frame Profile: 1.95"
- » Standard Angles: 30°, 45°, 60° (other angles available as specials)

Available Configurations

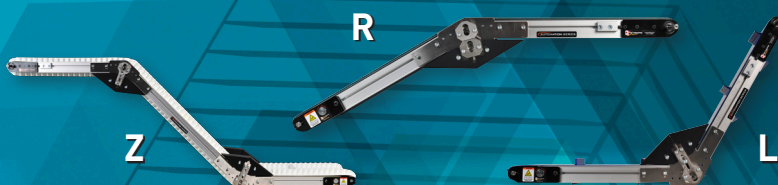

qcindustries.com | (513) 753-6000